

Explore our selection of accessories and parts for the OPTIMA STEAMER. Owning the world's best-selling dry vapor steamer can only get better when you add the right tools for the job.

Check out the OPTIMA STEAMER accessories designed specifically to help you get the job done quickly and effectively.

0

"OPTIMA STEAMER allows you to wash and sanitize anywhere and everywhere with little to no waste water."

### [85-50356] Steam Gun K26 with Nozzle 3.5

Ø3.5 Steam Nozzle with Silicone Protector

Matching Accessories

STANDARD

ONER

[85-50358] Steam Gun RL22 with Nozzle 5.5, Power



Power

0.14


Standard

Ø5.5 Steam Nozzle with Silicone protector

Matching Accessories

[85-50364] Power Steam Hose PTFE, 10m [85-50367] Power Steam Hose PTFE, 15m [85-50368] Power Steam Hose PTFE, 20m ※ Max. 600cc (0.16gal) / min dry steam

▶ Using the RL22 Steam gun & Power steam hose achieves up to 70% more steam flow than using the K26 Steam gun & Standard steam hose.

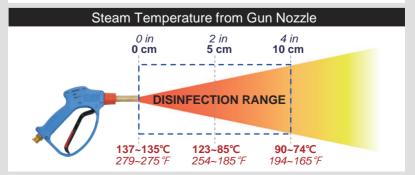

#### Lance Steam Guns K26 with Nozzle 3.5



[85-50351] Steam Gun K26 (300mm)



Ø3.5 Steam Nozzle with Silicone Protector

[85-50266] Steam Gun K26 (500mm)



[85-50354] Steam Gun K26 (1000mm)

Lance Steam Guns RL22 with Nozzle 5.5

[85-50084] Steam Gun RL22 (300mm)






Ø5.5 Steam Nozzle with Silicone Protector

[85-50267] Steam Gun RL22 (500mm)



[85-50087] Steam Gun RL22 (1000mm)

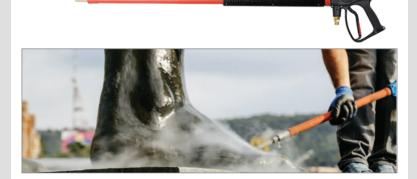


## [85-50197] Steam Nozzle 3.5 + Hand Grip, 250D



## [85-50198] Turbo Steam Nozzle + Hand Grip, 250D



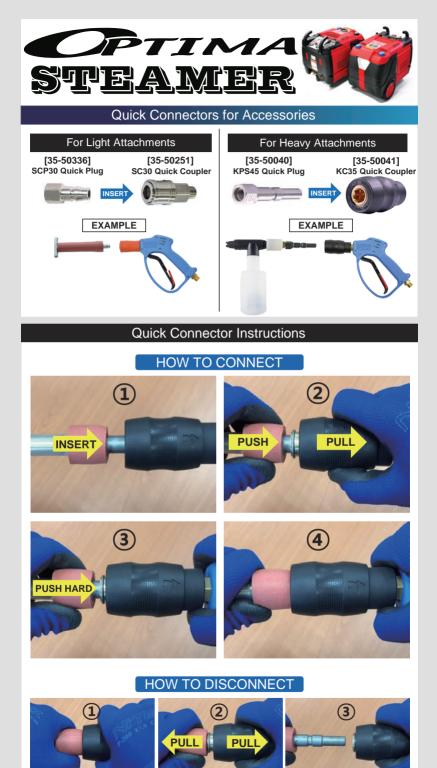

## [85-50253] Steam Gun K26 with SC30 Quick Coupler



\* Excellent for cleaning and restoring patterns of carpets, mats and more







#### [85-50056] Floor Spinner (KPS45 Quick Plug Applied)



[85-50187] Sand Sanitizing Wand (KPS45 Quick Plug Applied)





#### Weed Control Accessories (Weed Removal Tools)



\* Eradicate weeds using nothing but steam. The Weed Control Accessories inject steam into the root of weeds, delivering a concentrated dose of high temp moisture that begins killing plants immediately, all without the use of toxic herbicides. In a matter of days, the targeted plants will wilt and die, killed from the roots so the plant won't continue to regrow.



#### [85-50355] Steam Gun K26 with Weeding nozzle



1000mm




#### [85-50138] Weed Control, Bell with KPS45 Quick plug



[85-50035] Weed Control, Brush with KPS45 Quick Plug



[85-50036] Weed Control, Spear with KPS45 Quick Plug

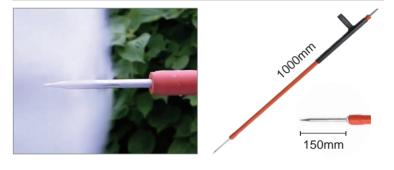

[85-50037] Weed Control, Flat Nozzle with KPS45 Quick Plug




[85-50038] Weed Control, Roller with KPS45 Quick Plug



#### Mop Wands with Squeegee (Telescoping Pole Applied)

[85-50089] Mop Wand with Squeegee (0.8 ~ 1.2 meter)
[85-50091] Mop Wand with Squeegee (1.4 ~ 2.4 meter)
[85-50092] Mop Wand with Squeegee (1.5 ~ 3.6 meter)
[85-50093] Mop Wand with Squeegee (2.2 ~ 5.5 meter)

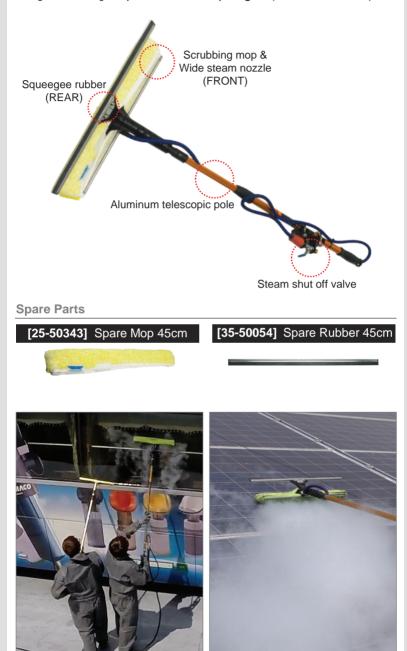

### [85-50220] Steam Extractor Hand Tool



X Cleaning and Sanitizing carpets & mats in combination with a vacuum cleaner



[85-50135] Barrel Cleaning Tool with Bimetal Thermometer




X Using the OPTIMA STEAMER and our Barrel Cleaning Tool will use a fraction of the water you would use with a pressure washer, while killing more bacteria in the surface of the barrel and penetrate deeper. Produce swell in minutes - not hours - while preserving toasting flavors and character rather than flushing them away.

## Conveyor Belt Cleaning Tools, Pneumatic type



|                            | 85-50201  | 85-50180            | 85-50200            |
|----------------------------|---|---------------------|---------------------|
| Required Steamer           | Optima 42K (SEII) and 27K (SEII, XE)                              |                     |                     |
| Continuous Steam Pressure  | 42K : 7 bar, 27K : 5 bar  |                     |                     |
| Required Compressed Air    | Air Compressor, 14.4 CFM @8 bar                                   |                     |                     |
| Working Air Pressure       | 73~116 psi (5~8 bar)  |                     |                     |
| Working Speed              | 150~1000 mm/s (5.9~39.4 inch/s)                                   |                     |                     |
| Recommended Belt           | non-flat open surface type (plastic modular, metal wire, rollers) |                     |                     |
| Material                   | aluminium, stainless steel  |                     |                     |
| (A) Air Inlet              | standard air quick plug   |                     |                     |
| (B) Cleaning Width, Max.   | 610 mm / 24 in  | 1000 mm / 39 in     | 1220 mm / 48 in     |
| (B) Cleaning Width, Min.   | 100 mm / 4 in   |                     |                     |
| (C) Mounting Width, Max.   | 970 mm / 38.1 in  | 1360 mm / 53.5 in   | 1580 mm / 62.2 in   |
| (C) Mounting Width, Min.   | 300mm / 11.8 in   |                     |                     |
| Dimension (L x W x H) mm   | 1320 x 160 x 730  | 1710 x 160 x 730    | 1930 x 160 x 730    |
| Dimension (L x W x H) inch | 51.97 x 6.3 x 28.75   | 67.33 x 6.3 x 28.75 | 75.99 x 6.3 x 28.75 |
| Weight                     | 12 kg (26.5 lbs)  | 13.2 kg (29.1 lbs)  | 14.5 kg (32 lbs)    |

X Compressed air required for the pneumatic type conveyor belt cleaning tools

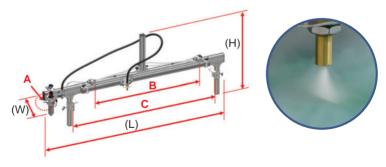





BEFORE

AFTER

[85-50131] Conveyor Tool, Suction type (Mounting Width ~1200mm)

Similar Item

Similar Item






[85-50083] Conveyor Belt Cleaning Tool, Suction type

[85-50132] Conveyor Tool, Basic type (Mounting Width ~1200mm)











Minimize maintenance, increase the lifespan of your machine, and save money. The biggest challenge to OPTIMA STEAMER owners is dealing with scale buildup as a result of hard-water minerals in water. The best means of improving your water quality, and we only recommended solution for preventing is to use a salt-based water softener and we've got one that will work great with the OPTIMA STEAMER—the LT5. The LT5 is powered by typical salt and will last most operators 1-2 weeks before needing to regenerate. What's better is that this filter was designed to be installed on the back of your OPTIMA STEAMER and to provide a mobile water softening solution that goes where your Optima goes. End the constant battle with scale buildup and get the best performance out of your machine. Connects via the Direct Water Feed connection. Recharge frequency varies based on water hardness and usage. Recharge using table salt.





# Inquiries: sales@sjecorp.com

## WWW.SJECORP.COM

SJECorp



#### Manufacturer Information SJE Corporation, Ltd. 78-21, Sandan 7-ro, Jeonggwan-eup, Gijang-gun, Busan South Korea +82 51-521-3200 sales@sjecorp.com www.sjecorp.com